

K
RAIN®

THE LANDSCAPER'S CHOICE
Heavy Duty

***RETRACTABLE
HOSE REEL 20m***



KR1125

**User
Manual**

2
YEAR
REEL
WARRANTY

10
YEAR
HOSE
WARRANTY

WWW.K-RAIN.COM.AU

Contents

Overview	4
Introduction	4
Safety Warnings	4
Main Components	5
Features	6
Installation	7
Plan your Hose Reel Installation	7
Adjusting Guide Arm	8
Attaching the Tap-to-Reel Hose	9
Mounting Hose the Reel	9
Operation	12
Locking the Hose Reel	12
Retracting the Hose Reel	12
Maintenance	13
Heavy Duty Hose	13
Warranty	14
2 Year Replacement Warranty - Reel	14
10 Year Replacement Warranty - Hose	15

Heavy Duty
RETRACTABLE
HOSE REEL 20m

Made from premium materials and ideal for vehicle mount, this Hose Reel is built with landscapers in mind. Scan to learn more.



SCAN FOR MORE INFO



Product code: KR1125

Overview

Introduction

Your K-RAIN **20m Heavy Duty Retractable Hose Reel** uses a 12mm Premium 20m Trade Hose with a PVC core and woven reinforcing for added strength and durability, rated to 700kPa.

- i** This instruction manual contains useful information on the proper use and care of this product. Please read through all instructions before attempting to use the **20m Heavy Duty Retractable Hose Reel**. Please keep this user guide handy for future use


Safety Warnings

- ⚠** Do not exceed the maximum working pressure of 700kPa
- ⚠** Do not leave the tap on—turn tap off after use and release excess pressure before retracting hose back into Hose Reel
- ⚠** Make sure the *Hose Reel* is mounted to a stable surface before use
- ⚠** Do not allow the hose to retract without controlling the recoil speed
- ⚠** Do not let go of the hose when rewinding
- ⚠** Keep children clear of work areas at all times
- ⚠** 3°C minimum working temperature

Overview (Continued)

Main Components

- | | |
|----------------------------|--------------------------------|
| 1. Mounting Bracket | 8. Threaded Connector |
| 2. 20m Outlet Hose | 9. 4× 14mm Metal Sleeves |
| 3. 2m Tap-to-Reel Hose | 10. 4× M10 80mm Mounting Bolts |
| 4. Guide Arm | 11. 4× 10mm Washers |
| 5. Stopper | 12. 4× 10mm Spring Washers |
| 6. 2× 12mm Hose Connectors | 13. 4× M10 Hex Nuts |
| 7. 20/25mm Tap Adaptor | |

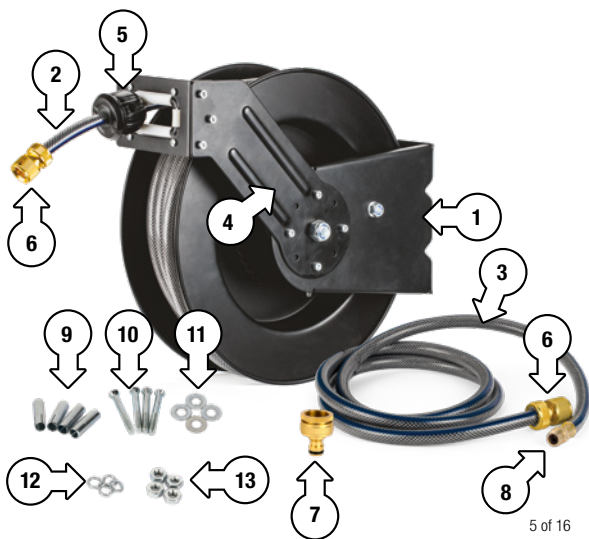

Overview (Continued)

Features


- ✔ Heavy duty metal construction
- ✔ Ideal for vehicle mount in utes or work vans
- ✔ Reconfigure mount angles for wall, floor or ceiling mount
- ✔ Spring loaded rewind assist mechanism
- ✔ Ratchet locking mechanism to lock in any position
- ✔ Premium 20m Trade Hose includes PVC core with woven reinforcing
- ✔ Tap-to-reel leader hose included

Installation


Plan your Hose Reel Installation

- i** Your **Hose Reel** should be installed nearest to your water source for convenience of use
- 1. **Hose Reel** can be mounted on the floor, ceiling or wall
- i** Mount **Hose Reel** to a load-bearing structure capable of supporting the combined weight of your reel, hose, and forces caused by pulling or manoeuvring the hose
- 2. Consult the chart on the left and choose the diagram that most closely matches your mounting position. If necessary, adjust **GUIDE ARM** position to match diagram


Wall



Ceiling





Floor/Bench




Installation (Continued)

Adjusting Guide Arm

1. Pull out 1 metre of hose and allow **Hose Reel** to lock in position
3. Rotate **GUIDE ARM** in 90° increments to desired position. Replace four bolts and tighten

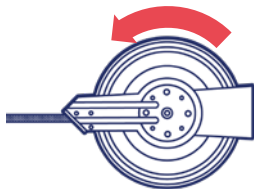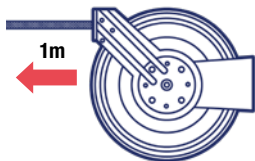

2. Remove the four bolts connecting **GUIDE ARM** [a] to **MOUNTING BRACKET** [b]

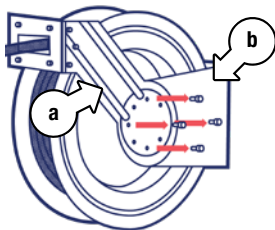

Installation (Continued)

Attaching the Tap-to-Reel Hose

- i** To connect the hose reel to a tap, first assemble the Tap-to-Reel Hose onto the side inlet
- i** Use a 17mm or shifting spanner to ensure the hose is tight and leak-free



Mounting Hose the Reel

1. Check the **TAP-TO-REEL HOSE** can reach your tap prior to installing the **MOUNTING BRACKET**
2. Mark inside the centre of each of the bracket holes to prepare for drilling
3. Use the table below to select the correct drill bit for your **Hose Reel**



- i** It is very important to use the correct size drill bit, for a very secure fit of the **MOUNTING BRACKET**

SLEEVE



Ø14.0mm

MASONRY DRILL



Ø14.0mm

BOLT




Ø15.0mm

Installation (Continued)


Mounting the Hose Reel (continued)

4. When ready, drill all four holes, then hammer **MOUNTING BOLTS** and **METAL SLEEVES** [a] gently into wall (if attaching to a wall)


i If using bolts and plugs that were not included with your **Hose Reel**, drill slightly under size as masonry materials all have different properties which will ensure the wall plugs have a secure fit

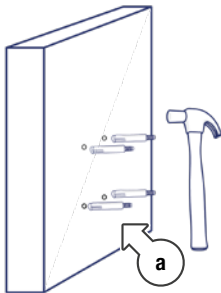

5. Tighten **HEX NUTS** [b] onto **MOUNTING BOLTS** to splice **METAL SLEEVES** and secure **MOUNTING BOLTS** to wall

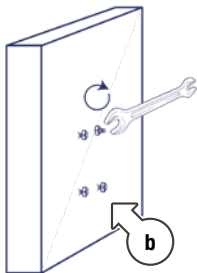


6. Loosen **HEX NUTS** [c] and remove to attach **MOUNTING BRACKET**

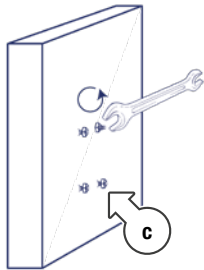


Installation (Continued)

Mounting the Hose Reel (continued)

7. Put **MOUNTING BRACKET** [d] on **MOUNTING BOLTS** [e] and fit **SPRING WASHERS** [f], **WASHERS** [g] and **HEX NUTS** [h]

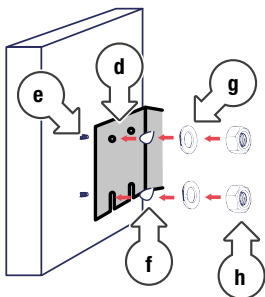

8. Tighten **HEX NUTS** [i] using a spanner to secure to wall

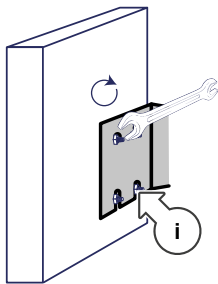

9. Connect **TAP-TO-REEL HOSE** to your water source

Operation

Locking the Hose Reel

1. To check if the **Hose Reel** is working properly, pull on the hose slowly. The reel will click at every half revolution of the drum
2. To lock the **Hose Reel**, pull on the hose and allow it to retract after 1 to 3 clicks

Retracting the Hose Reel

1. To retract the **Hose Reel**, turn off the tap and press the level on watering gun (not included) to release water pressure
 - i** This makes the retraction of the hose a lot easier and prolongs the life of your **Hose Reel**
2. Pull the hose until the clicking stops. Control the hose as it retracts
 - ⚠ Do not let go of the hose when rewinding, always guide back into **Hose Reel****
 - i** Feed hose from left to right to evenly layer hose when retracting hose back into reel

Maintenance

Heavy Duty Hose

- ⓘ Maintain the product with care. Inspect hose periodically and, if damaged, have it repaired by an authorized technician
- ⚠ **Do not leave the water turned on with the hose under pressure when not in use**
- ⚠ **Always turn the water off and release all of the water from the hose after use**
- ⚠ **Do not attempt to pull *Hose Reel* apart**
- ⚠ **Always guide the HEAVY DUTY HOSE back into the *Hose Reel***

Warranty

2 Year Replacement Warranty - Reel



Holman offers a 2 year replacement guarantee with this product.

In Australia our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

As well as your statutory rights referred to above and any other rights and remedies you have under any other laws relating to your Holman product, we also provide you with a Holman guarantee.

Holman guarantees this product against defects caused by faulty workmanship and materials for 2 years domestic use from the date of purchase. During this guarantee period Holman will replace any defective product. Packaging and instructions may not be replaced unless faulty.

In the event of a product being replaced during the guarantee period, the guarantee on the replacement product will expire 2 years from the purchase date of the original product, not 2 years from the date of replacement.

To the extent permitted by law, this Holman Replacement Guarantee excludes liability for consequential loss or any other loss or damage caused to property of persons arising from any cause whatsoever. It also excludes defects caused by the product not being used in accordance with instructions, accidental damage, misuse, or being tampered with by unauthorised persons, excludes normal wear and tear and does not cover the cost of claiming under the warranty or transporting the goods to and from the place of purchase.

Warranty (Continued)

10 Year Replacement Warranty - Hose



Holman offers a 10 year replacement guarantee with this product.

In Australia our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

As well as your statutory rights referred to above and any other rights and remedies you have under any other laws relating to your Holman product, we also provide you with a Holman guarantee.

Holman guarantees this product against defects caused by faulty workmanship and materials for 10 years domestic use from the date of purchase. During this guarantee period Holman will replace any defective product. Packaging and instructions may not be replaced unless faulty.

In the event of a product being replaced during the guarantee period, the guarantee on the replacement product will expire 10 years from the purchase date of the original product, not 10 years from the date of replacement.

To the extent permitted by law, this Holman Replacement Guarantee excludes liability for consequential loss or any other loss or damage caused to property of persons arising from any cause whatsoever. It also excludes defects caused by the product not being used in accordance with instructions, accidental damage, misuse, or being tampered with by unauthorised persons, excludes normal wear and tear and does not cover the cost of claiming under the warranty or transporting the goods to and from the place of purchase.

Should you suspect your product may be defective and need some clarification or advice please contact us directly:

1300 716 188
support@holmanindustries.com.au
11 Walters Drive, Osborne
Park 6017 WA

If you are certain your product is defective and is covered by the terms of this warranty, you will need to present your defective product and your purchase receipt as proof of purchase to the place you purchased it from, where the retailer will replace the product for you on our behalf.



We really appreciate having you as a customer and would like to say thank you for choosing us.

We recommend registering your new product on our website. This will ensure we have a copy of your purchase and activate an extended warranty. Keep up to date to with relevant product information and special offers available through our newsletter.



Scan here, or visit
k-rain.com.au/register
for more info